

# HYDROMAX ARCTIC 32

Product code: 261300101

## Synthetic hydraulic fluid for extreme low temperature applications

This oil is non-toxic, developed for hydraulic systems used in food, drink and pharmaceutical processing and packaging equipment operating at very low temperatures. Also suitable for other hydraulic systems where a clean, non-staining hydraulic oil is desired.

## Benefits & Advantages

- Low coefficient of friction provides excellent lubrication and reduces wear
- Fully synthetic oil provides extremely low temperature stability and ensures greatly extended servicing intervals
- Low foaming reduces residue and scum build-up, which extends maintenance intervals

## Applications


For gearboxes and reduction units and drive and conveyor chains. For optimum performance, drain gearbox of previous lubricants.

## Typical Performance Data

Typical	Test Method	Value
Base fluid	-	PAO
Appearance	Visual	Clear
Viscosity @ 40 °C, mm <sup>2</sup> /s	ASTM D-445	32
Viscosity @ 100 °C, mm <sup>2</sup> /s	ASTM D-445	6.1
Viscosity index	ASTM D-2270	138
Temperature range, °C	-	-60 – 200
Pour point, °C	ASTM-97	-63
Flash point COC, °C	ASTM-D-92	244

# HYDROMAX ARCTIC 32

Product code: 261300101

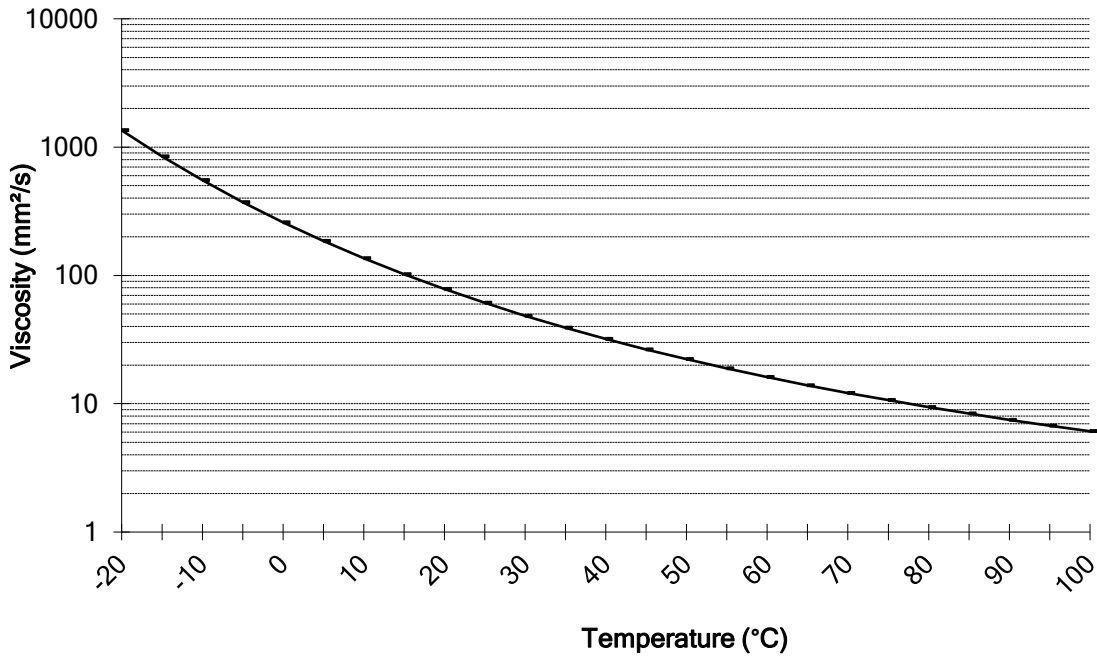

All performance data on this Technical Data Sheet are indicative only and can vary during production.